


Series 400 Low-Loss Coaxial Cable

Type : LMR-400 (DW-400)

Document	DW-400
Issue Date	Jan.17 th .2006
Page	1 of 2

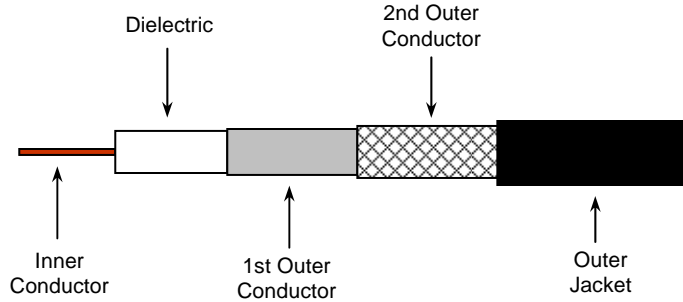

Cable Ordering Information

Part Number	MI Number	NEC / CSA Listing	Remark
DW-400 (CCA)	TU-1317	none	

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper-clad Aluminum	0.108	2.74
Dielectric	Foamed Polyethylene	0.285	7.24
1 st Outer Conductor	Sealed APA Tape	0.290	7.37
2 nd Outer Conductor	98% Tinned Copper Braid	0.322	8.17
3 rd Outer Conductor	---	---	---
4 th Outer Conductor	---	---	---
Floodant	---	---	---
Jacket	PE, Black	0.406	10.30
Twisted Pairs	---	---	---
Messenger	---	---	---
Mechanical Specifications			
Minimum Bend Radius		1.0	25.4
Product Weight	(less reel)	76.6 lbs/kft	114 kg/km

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

uncontrolled copy

All Rights Reserved,
Specifications subject to change without notice

Series 400 Low-Loss Coaxial Cable

Type : LMR-400 (DW-400)

Document	DW-400
Issue Date	Jan.17 th .2006
Page	2 of 2

Electrical Specifications		
Characteristic Impedance, Ω	50 \pm 3	
Velocity of Propagation, %	85	
Capacitance, Nominal	23.8 pF/ft	78 pF/m
DC Resistance	Ω / kft	Ω / km
Inner Conductor	1.34	4.40
Outer Conductor	1.65	5.41
Loop	2.99	9.81

Attenuation, Nominal @ 68 °F (20 °C)		
Frequency, MHz	dB / 100 ft	dB / 100 m
150	1.72	5.64
220	2.07	6.79
450	3.12	10.24
900	4.49	14.72
1500	5.86	19.21
1800	6.47	21.22
2000	6.91	22.66
2500	7.82	25.65

Notes:

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

uncontrolled copy

All Rights Reserved,
Specifications subject to change without notice