


N ATTENUATOR (50 Watt) N Male to Female

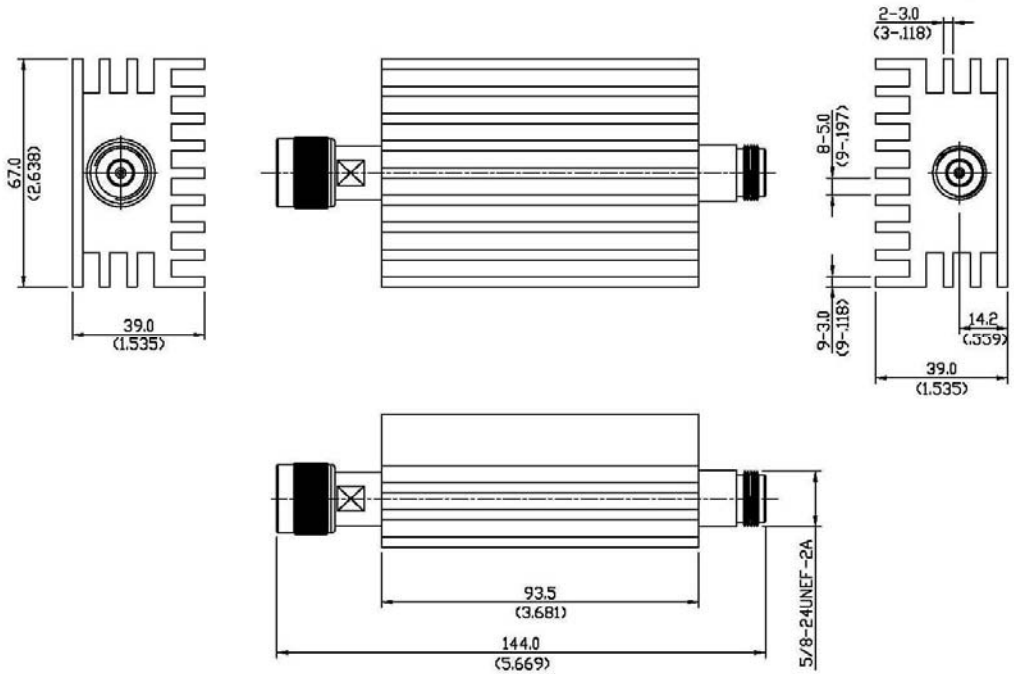

Frequency Range DC ~ 2000MHz
 Temperature - 40 °F ~ 158 °F
 Peak Power 50 Watts

Connector Parts	Material	plating
Bodys	Brass	Gold Plating
Coupling Nut	Brass	Gold Plating
Male Contact	Brass	Gold Plating
Female Contact	BeCu	Gold Plating
Insulator	PTFE	---

Part #	Attenuation	Frequency	Impedance	VSWR	Power
A750-30	30 ± 0.5	DC ~ 2 GHz	50Ω ± 5	1.25 (Max)	50 Watt