

SMA ATTENUATOR (1 Watt) SMA Male to Female


SPECIFICATION

Frequency Range	DC ~ 3000 MHz
V.S.W.R	1.15:1 (max.)
Average Power	1WATT
Temperature	- 4 °F ~ 140 °F

Part #	Attenuation	Frequency	Impedance	VSWR	Power
A701-01	1 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-02	2 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-03	3 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-04	4 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-05	5 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-06	6 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-07	7 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-08	8 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-09	9 ± 0.3	DC ~ 3 GHz	50Ω ± 2	1.1 (Max)	1 Watt
A701-10	10 ± 0.5	DC ~ 3 GHz	50Ω ± 3	1.15 (Max)	1 Watt
A701-15	15 ± 0.5	DC ~ 3 GHz	50Ω ± 3	1.15 (Max)	1 Watt
A701-20	20 ± 0.5	DC ~ 3 GHz	50Ω ± 3	1.15 (Max)	1 Watt
A701-30	30 ± 0.5	DC ~ 3 GHz	50Ω ± 3	1.15 (Max)	1 Watt

Materials and Finish

Bodys	Brass Gold Plating
Coupling	Nut Brass Gold Plating
Male Contact	Brass Gold Plating
Female Contact	BeCu Gold Plating
Insulator	PTFE

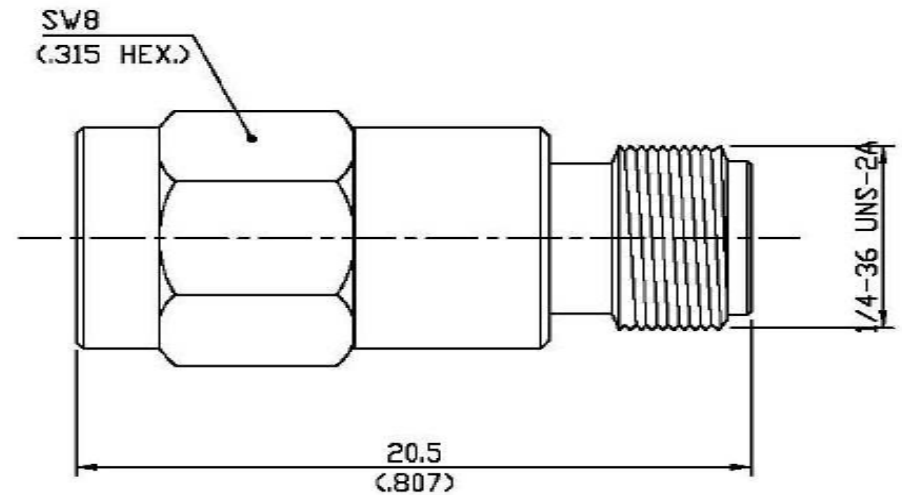

[unit:mm]