


REVISIONS			
NO	DESCRIPTION	APPROVED	DATE

- Impedance.....50Ω
- Frequency range.....DC ~ 6GHz
- V.S.W.R.....N/A
- Dielectric withstanding
 - Voltage(at sea level).....500Vrms.50Hz
 - Working voltage(at sea level).....≤170Vrms.50Hz
- Insulation resistance.....≥10³ MΩ
- Center contact resistance.....≤5.0MΩ
- Out contact resistance.....≥2.5MΩ
- Temperature range.....-55°C ~ +155°C
- Temperature shock.....MIL-STD202, Method107, ConditionF
- Moisture resistance.....MIL-STD202, Method106
- Corrosion.....Saltspray Test acc.to MIL-STD-202, Method101, ConditionB
- Vibration.....MIL-STD202, Method204, ConditionC
- Engagement force.....≤15N/3.4lbs.
- Diengagement force.....6N-15N/1.4lbs.-3.4lbs.
- Contact captivation.....≥10N/2.3lbs.
- Durability(Matings).....≥500

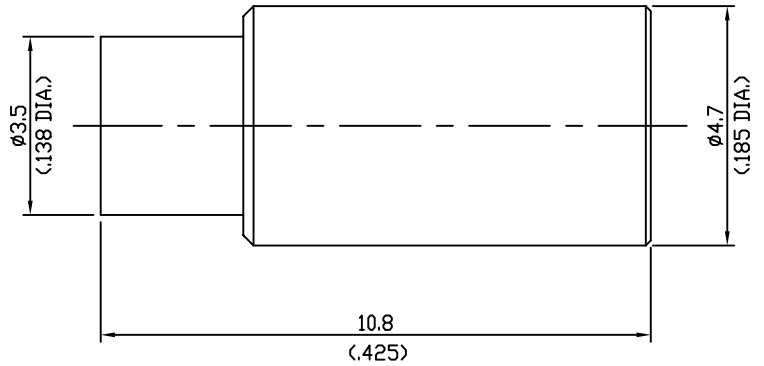

Connector parts	Material	Plating
Bodys	Brass	Gold
Center contact	Beryllium-copper	Gold
Insulator	PTFE	White

TOL.UNLESS NOTED
X = ±0.1
X.X = ±0.05
X.XX = ±0.01

DATE	
DRAWN BY	
DESIGNED BY	
CHECKED BY	
APPD.BY	
SCALE 1:1	UNIT mm

	www.rfacsolutions.com
	TITLE MMCX STRAIGHT JACK .085"(RG-405, M17/133)
DRAWING NO R310-005-000	
SHEET 1 OF 1	